

ENGINEERED TURF PRODUCTS



SCAN FOR WEBSITE



HEATMAXX SOFT™ 65

- 100% New Proprietary Nylon yarn construction delivers superior preformance that is "Soft as Poly, Strong as Nylon".
- NO INFILL REQUIRED! Fiber and turf design keeps fibers upright even in heavy use areas.
- Class A Fire Rating- the only turf warranted against reflective burns from Low E Windows.
- Certified for all indoor applications and exterior rooftops.
- 100% ADA wheelchair compliant and meets safety standards!



HEATMAXX SOFT ™

RECOMMENDED APPLICATIONS

FOOT TRAFFIC











PRODUCT SPECIFICATIONS

YARN TYPE: NYLON

YARN COLOR: VERDE & LIME GREEN

THATCH COLOR: VERDE GREEN TAN

FACE WEIGHT: 65 OZ/SY

PILE HEIGHT: 1-5/8"

BACKING: 20 OZ BLACK URETHANE

WARRANTY: 15 YEAR PRO RATED WARRANTY












ENGINEERED TURF PRODUCTS

HEATMAXX SOFT™ 65 AATCC 134 - ANTI-STATIC PASS ASTM C1028 - STATIC/FRICTION PASS ASTM D1335 - TUFT BIND 16.5 LB ASTM F2765 - LEAD LEVELS <0.01 PPM ASTM D2859 - FLAMMABILITY (PILL TEST) PASS PASS ASTM E648 - FLAMMABILITY (CRITICAL RADIANT FLUX) PASS ASTM 5034 - GRAB TEAR STRENGTH COMPLIANT ASTM F1951 - ADA WHEELCHAIR >600 IN/HR ASTM F1551 - WATER PERMEABILITY CLASS A ASTM E108 - FIRE TEST (ROOF DECKS)

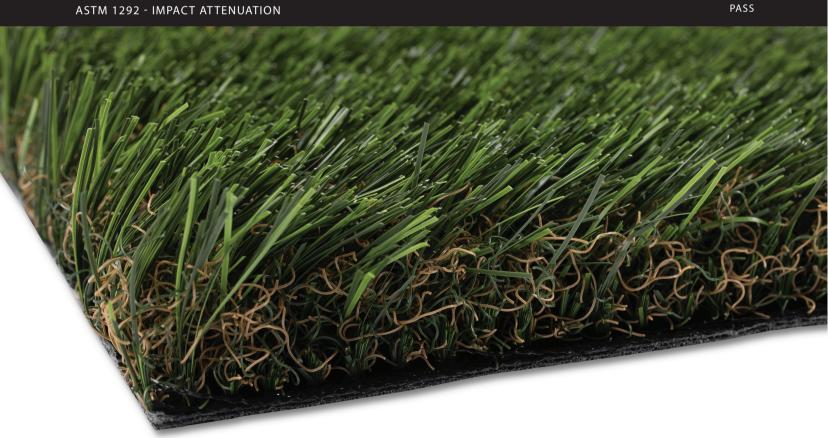

CLASS C

ASTM E84 - SURFACE FLAMMABILITY/SMOKE DENSITY